



Section 12

APPLIANCE HOSES - STATIONARY

DORMONT YELLOW COATED

APPLIANCE HOSES - CASTOR MAOUNTED

DORMONT BLUE COATED

STAINLESS STEEL FLEXIBLE HOSES

DORMONT "SUPR-SAFE"

STAINLESS STEEL FLEXTUBES

DORMONT "T" SERIES

QUICK DISCONNECT DEVICES

DORMONT "SNAPFAST" & "SAFETY QUIK"

SWIVEL CONNECTORS

DORMONT "SWIVELMAX"

APPLIANCE RESTRAINT KITS

DORMONT

GAS CONNECTORS



Dormont Stationary Appliance Gas Connectors

- Flexible stainless steel
 - PVC coated for food industry service
 - 1/2, 3/4 & 1" diameter available
 - 900 & 1200mm long available
 - Male / female end fittings
 - Male end fitting internally threaded
- #DR20054, 1/2" x 900mm
 #DR20055, 1/2" x 1200mm
 #DR20074, 3/4" x 900mm
 #DR20075, 3/4" x 1200mm
 #DR20105, 1" x 1200mm



Dormont Castor Mounted Appliance "Blue Hose" Connectors

- Heavy duty corrugated 304 stainless steel
 - Tight weave outer braid prevents overstretching
 - PVC coated for food industry service
 - 3/4 & 1" diameter available
 - 1200mm long
 - Male / female end fittings
 - Male end fitting internally threaded
- #DR036248, 3/4" x 1200mm
 # DR036248, 1" x 1200mm




Dormont "Supr-Safe" Stainless Steel Gas Connectors

- Ideal for final connection in lieu of solid pipe
- 1/2, 3/4/ 1 & 1 1/4" diameter available
- Various lengths available
- Male / female end fittings
- Male end fitting internally threaded

- #DR22012, 1/2" x 300mm
 #DR22018, 1/2" x 450mm
 #DR22024, 1/2" x 600mm
 #DR22030, 1/2" x 750mm
 #DR22036, 1/2" x 900mm
 #DR22048, 1/2" x 1200mm
 #DR24012, 3/4" x 300mm
 #DR24024, 3/4" x 600mm
 #DR24036, 3/4" x 900mm
 #DR24048, 3/4" x 1200mm
 #DR25024, 1" x 600mm
 #DR25036, 1" x 900mm
 #DR26030, 1 1/4" x 900mm

NOTE: Other lengths available on indent only

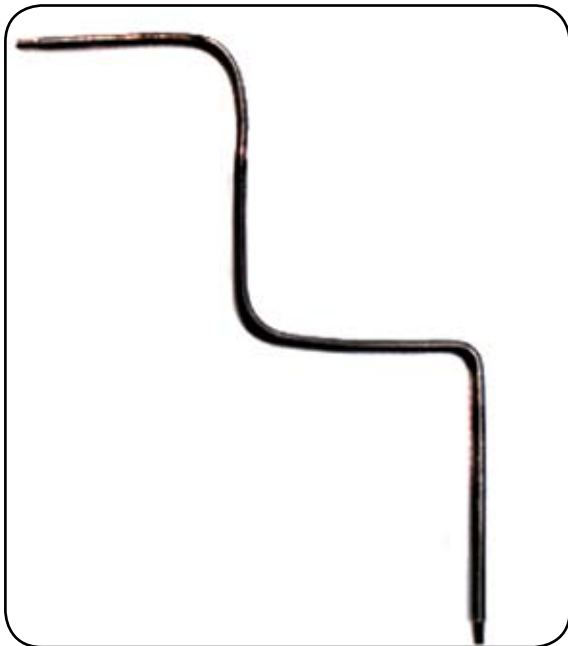

Dormont Stainless Steel Flextubes

- Ideal for pilot tubes in lieu of copper pipe
- Fully flexible
- 25mm smooth neck for nut & olive
- Bends around sharp angles with ease
- 1/4, 3/8 & 1/2" diameter available
- Various lengths available

#DR1012, 1/4" x 300mm

#DR1018, 1/4" x 450mm

#DR1024, 1/4" x 600mm

#DR1106, 3/8" x 150mm

#DR1110, 3/8" x 200mm

#DR1112, 3/8" x 300mm

#DR1116, 3/8" x 400mm

#DR1118, 3/8" x 450mm

#DR1124, 3/8" x 600mm

#DR1128, 3/8" x 700mm

#DR1148, 3/8" x 1200mm

#DR1224, 1/2" x 3600mm

#DR1126, 1/2" x 1200mm

NOTE: Dormont will design and manufacture specific connectors to suit individual requirements. (Minimum quantity applies). Please contact SCE for further information and pricing



Dormont "Snapfast" Quick Disconnect Device

- Quick disconnect gas coupling
- One hand action
- Quick connect is self sealing
- Thermal fuse protection incorporated @ 175OC
- 7 kPa pressure rated
- 1/2, 3/4 & 1"

#DR01050, 1/2" npt

#DR01075, 3/4" npt

#DR01100, 1" npt



Dormont "Safety Quik" Cimfast Quick Disconnect Valve

- Incorporates quick disconnect & ball valve in one unit
 - Thermal fuse protection incorporated @ 175OC
 - Safety feature - safety sleeve only allows disconnection if ball valve is in off position
 - Quick connect is self sealing
 - 7 kPa pressure rated
 - 1/2, 3/4 & 1" npt
- #DR02615, 1/2" npt
 #DR02620, 3/4" npt
 #DR02625, 1" npt



Dormont "swivelmax" Connector

- Full 360O swivel reduces stress on connector
 - Allows increased movement at either end of the connector
 - 120mm adjustable spring band
 - 3/4 & 1" diameter available
 - SPDT contacts
- #DR02075, 3/4" npt
 #DR02100, 1" npt



Dormont Appliance Restraint Kit

- As required by the Building code
- 300mm shorter than corresponding hose length
- Prevents stress on connector when appliance pulled out
- Complete fitting kit

#DR6148, 1200mm Restraint Kit