



## **T46 & 2C SERIES - 1900 AND 1980 SERIES**

### **THERMOCOUPLES**



Robertshaw® thermocouples are the industry leader for gas heating and appliances. Their primary function is to ensure a standing pilot light is operative so that on a call for heat, the main burner gas will be properly ignited. Thermocouples are placed in gas applications to detect existence of a flame for safety purposes by shutting off the potential gas flow to a burner.

The Robertshaw thermocouples are made of two different metals with various lengths. A thermocouple 18" [460 mm] long has a lower resistance and higher electrical output compared to a 72" [1830 mm] thermocouple which has a higher resistance (longer wire) and, therefore, lower electrical output.

The 1980 Series are T-46 thermocouples which have a threaded nut attached and a tinnerman clip included.

The 1980 Series Snap-Fit® thermocouples, also known as 2C thermocouples, offer easy installation into the majority of pilot burners. Both slim and standard thermocouple types are available in the 1980 Series. They are manufactured without complicated adaptors, but with extra insulation that the brass sheath provides under high ambient temperatures.

### **Specifications**

- Lead lengths range from 12 to 72" [305 to 1830 mm]
- Open circuit output: 25 and 30 millivolts
- Connection Type: Male connector nut

### **Features and Benefits**

- Easy burner installation with attached threaded nut
- Stainless steel outer jacket for long life and resistance to heat blistering
- Combination of copper and nickel alloys for good electrical conductivity
- Mica washer to insulate from shorting conditions
- Tinnerman clip included
- Various lengths available for multiple applications

# Robertshaw®


## T46 & 2C SERIES - 1900 AND 1980 SERIES

### THERMOCOUPLES


#### PRODUCT DIMENSIONS

Dimensions are inches and [millimeters].

#### T-46 Series

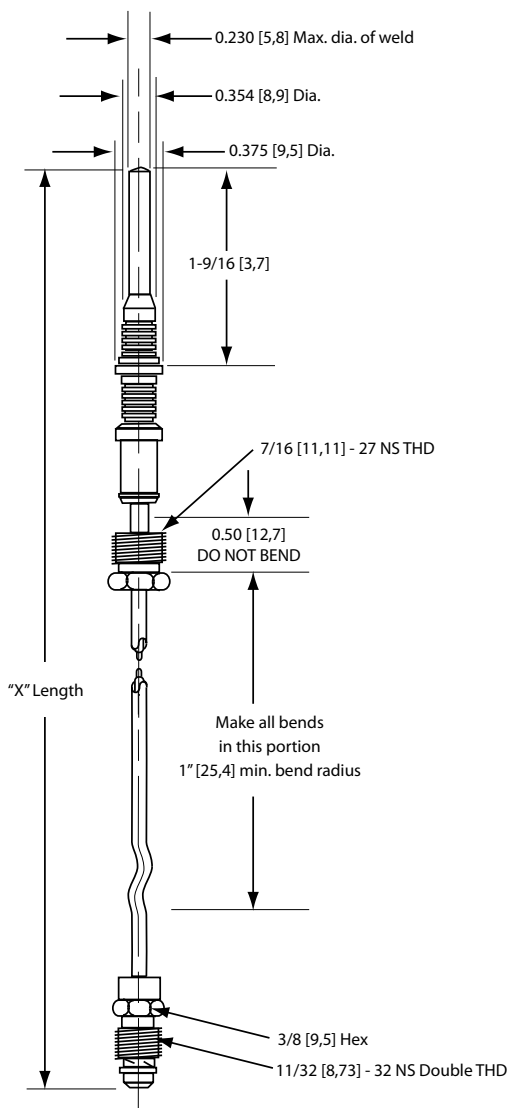

#### 2C Series

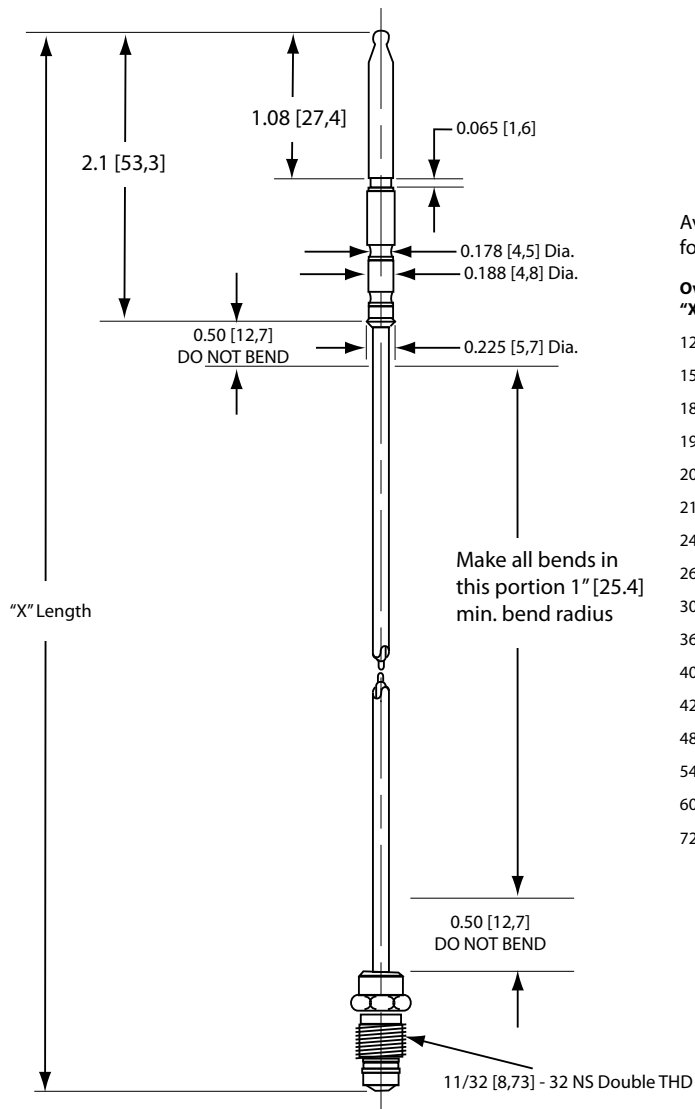

Available in the following lengths:

#### Overall "X" Length

12" [304,8]  
15" [381,0]  
18" [457,2]  
19" [482,6]  
20" [508,0]  
21" [533,4]  
24" [609,6]  
26" [660,4]  
30" [762,0]  
36" [914,4]  
40" [1016,0]  
42" [1066,8]  
48" [1219,2]  
54" [1371,6]  
60" [1524,0]  
72" [1828,8]

**Robertshaw**

Customer Service Telephone 1.800.304.6563  
Customer Service Facsimile 1.800.426.0804  
HVACustomerService@robertshaw.com

For Technical Service  
Telephone 1.800.445.8299  
Facsimile 1.630.260.7294  
TechnicalService@robertshaw.com

Robertshaw® and Uni-Line® are trademarks of Robertshaw, its subsidiaries and/or affiliated companies. All other brands mentioned may be the trademarks of their respective owners.

www.robertshaw.com  
www.Uni-Line.com  
©2014 Robertshaw  
09/14 - 150-2378 RevB