




INSTALLATION DATA

4590 SLIP-FIT® DIAL KIT

The Robertshaw® SLIP-FIT® 4-way dial with separate, friction fit temperature scale insert, will adapt to any of four mounting positions. After control has been installed, assemble blank dial onto "D" stem of control. Turn dial counterclockwise to stop (off position). Place temperature scale insert over dial and line up the "OFF" marking on insert with the "OFF" indicator on chrome bezel or on panel.

Be sure that temperature scale insert fits over the four locator ribs on base of blank dial (see photo), before pressing insert down. Use the outer edge to press insert down, not the center as this could bend the insert. If removal of temperature scale insert is necessary, pull dial off of "D" stem. Using a small blunt object push out the insert using the removal opening provided (see photo below).

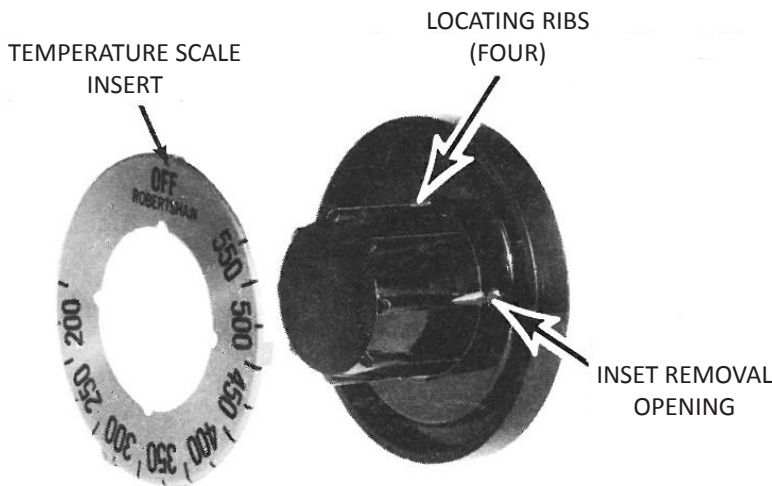

For Technical Service
Telephone 1.800.445.8299
Facsimile 1.630.260.7294
TechnicalService@robertshaw.com
Customer Service Telephone 1.800.304.6563
Customer Service Facsimile 1.800.426.0804
HVACCustomerService@robertshaw.com

Robertshaw®, Ranco®, Paragon® and Uni-Line® are trademarks of Robertshaw, its subsidiaries and/or affiliated companies. All other brands mentioned may be the trademarks of their respective owners.

www.uni-line.com
www.robertshaw.com
©2014 Robertshaw
08/14 – 1-199 RevC